



VSA301-G270T02-I

V1.0





4.
 $T_A=25^{\circ}\text{C} \pm 5^{\circ}\text{C} \quad U_C=\pm 15\text{V} \quad R_M$

(AC rms)	U_{PNAC}	--	--	300	--	V
(DC)	U_{PNDC}	--	-300	--	300	V
	U_{POL}	1	-500	--	500	V
(DC)	U_c		± 9	--	± 15	V
	I_c	U_{POL}	--	± 130	--	mA
	K_N		500:20			V/mA
	I_S	U_{POL}	--	± 20	--	mA

 R_M

5.


		U_a	50Hz 1min	--	2	--	kV

6.

	T_A	--		-10	--	+70	°C
	T_S	--		-25	--	+85	°C
	RH			20	--	80	%
	m	--		350±5			g



8.

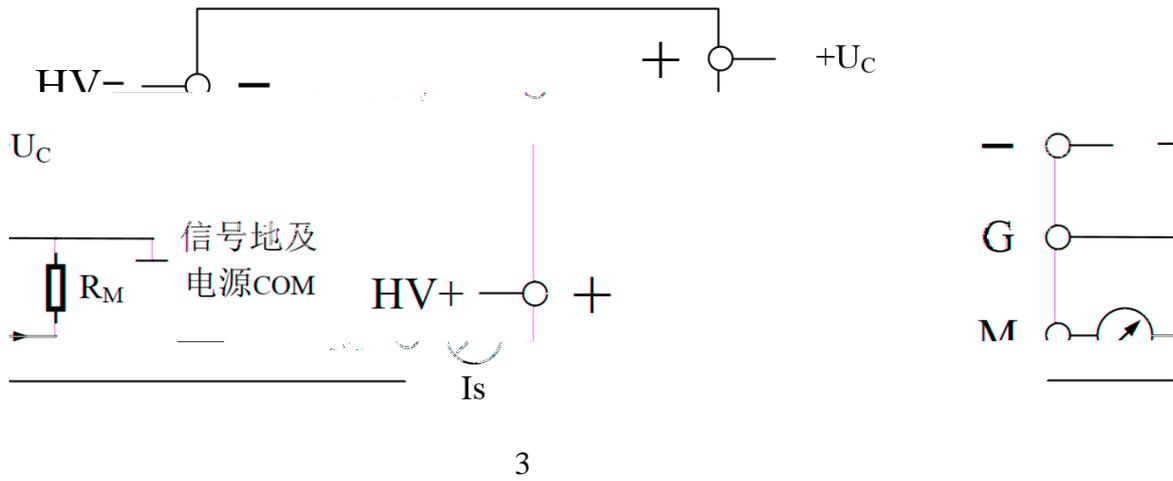

R_M

I_s

U_p

$$U_p = K_N * I_s$$

9.

1		VSA301-G270T02-I	1	
2		VSA301-G270T02-I	1	

10.



湖南省长沙市经济技术开发区开元路17号湘尚世纪鑫城42-44楼(410073)

前台: +86-731-8839 2988

传真: +86-731-8839 2900

商务: +86-731-8839 2955

技术咨询: +86-731-8839 2611

网址: www.vfe.ac.cn



银河微信公众号